



HAL
open science

Quasi-Online Disturbance Rejection for Nonlinear Parabolic PDE using a Receding Time Horizon Control

Thérèse Azar, Laetitia Perez, Christophe Prieur, Emmanuel Moulay, Laurent Autrique

► **To cite this version:**

Thérèse Azar, Laetitia Perez, Christophe Prieur, Emmanuel Moulay, Laurent Autrique. Quasi-Online Disturbance Rejection for Nonlinear Parabolic PDE using a Receding Time Horizon Control. 2021 European Control Conference (ECC), Jun 2021, Rotterdam, Netherlands. pp.2603-2610, 10.23919/ECC54610.2021.9654905 . hal-03276901

HAL Id: hal-03276901

<https://univ-angers.hal.science/hal-03276901>

Submitted on 7 Apr 2022

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Quasi-Online Disturbance Rejection for Nonlinear Parabolic PDE using a Receding Time Horizon Control

Thérèse Azar¹, Laetitia Perez¹, Christophe Prieur², Emmanuel Moulay³ and Laurent Autrique¹

Abstract—Null controllability of nonlinear partial differential equation is a very complex challenge. The context underlying this study is to improve the behavior of the plasma in a tokamak reactor in order to lengthen the duration of the nuclear fusion process. Considering the class of a specific parabolic PDE, the well known heat equation is nonlinear if thermal properties are temperature dependent. In such a context a numerical method based on the resolution of inverse heat conduction problem is proposed. It aims to provide identified control laws quasi-online in order to guarantee that the thermal state is kept close to its equilibrium state at zero. The iterative conjugate gradient method is implemented in order to control the temperature in the one-dimensional spatial domain despite several disturbances (time-dependent or thermo-dependent). The proposed strategy is based on successive numerical resolutions of ill-posed inverse problem on receding time horizons which are adapted considering the previous evolution of the system. Numerical results in the investigated configuration highlight that identified control laws are able to reject disturbances and to ensure null controllability.

I. INTRODUCTION

Partial differential equations (PDE) are widely investigated in physics and the development of efficient control strategies is a key-requirement for numerous processes. A classic objective is to seek to maintain the state of the system in the neighbourhood of a desired target regardless of the evolution of the uncontrolled inputs. In the following a parabolic nonlinear PDE is studied. A one dimensional domain is considered and the study is motivated by the control of nuclear fusion for which both magnetic flux density and thermal state is described by such a PDE system [1], [2], [3]. Numerous approaches have been developed in the past decades: sliding mode approach in infinite dimension, feedback control [4], H_∞ control [5], model predictive control [6], control-oriented model [7], ... However, disturbances rejection is complex to ensure from a theoretical point of view if mathematical model nonlinearities are not neglected. Moreover, if the location of the actuators is different from the spatial area where disturbances occur, the problem of optimal control is quite difficult to deal with.

This work was supported by the regional programme Atlanstic 2020, funded by the French Region Pays de la Loire and the European Regional Development Fund.

¹T. Azar, L. Perez and L. Autrique are with LARIS, Polytech of Angers, France

²C. Prieur is with Gipsa-Lab, Grenoble, France

³E. Moulay is with XLIM, Poitiers, France

In the following the method presented in [8] is modified in order to provide a quasi-online numerical strategy for the identification of control laws. The goal is to identify the control that keeps the system state close to zero (null controllability) using the conjugate gradient problem. This method is relevant for ill-posed problem such as Inverse Heat Conduction Problem IHCP [9], [10]. In thermal context, adaptive selection of relevant sensors in a network for unknown mobile heating flux estimation has been proposed in [11]. The approach presented in the following is different from model predictive control but corresponds to a delayed command [12], [13]. From the theoretical point of view, the null controllability problem for the heat equation has been investigated for example in [14].

The paper is organized as follows. In addition to this introductory section, Section II is devoted to the mathematical description of the physical system. Direct problem is numerically solved in order to describe temperature evolution of the uncontrolled nonlinear system from a given initial state. Effect of several disturbances is highlighted and analyzed considering a relevant cost-function. In Section III, an iterative regularization method is described in order to solve the IHCP for which the unknown parameter which has to be identified is the control (depending on time and space). Adaptation of such method to an online implementation is presented in Section IV and numerical results are shown in order to discuss the method performances. Comparison between several online strategies are presented in Section V. In the last section concluding remarks and several outlooks are proposed.

II. PROBLEM STATEMENT

A. Mathematical Description

Let us consider the direct problem modeled by the following parabolic PDE:

$$\left\{ \begin{array}{l} \rho C \frac{\partial \theta}{\partial t} - \frac{\partial}{\partial x} \left(\lambda(\theta) \frac{\partial \theta}{\partial x} \right) = u|_{[a,b]} + f|_{[c,d]} \\ \theta(0, t) = \theta(L, t) = 0 \\ \theta(x, 0) = \theta_0(x) \end{array} \right. \quad (1)$$

The space variable is $x \in \Omega = [0, L]$, $t \in [0, t_f]$ is the time variable where t_f is the final time, ρC is the volumic heat in $J.m^{-3}.K^{-1}$, $\theta(x, t)$ in K is the temperature at point x at the instant t . It is important to specify that θ is the

temperature variation compared to a reference temperature (in what follows, negative temperatures therefore mean that the temperature is lower than the reference temperature). $\lambda(\theta)$ is the thermal conductivity in $W.m^{-1}.K^{-1}$.

$u|_{[a,b]}(x,t)$ is the control applied to the interval $[a,b] \subset]0,L[$ which aims to keep the system state θ close to zero despite disturbances $f|_{[c,d]}(x,t)$ acting on $[c,d] \subset]0,L[$.

Boundaries condition for $x \in \{0, L\}$ are Dirichlet conditions and $\theta_0(x)$ is the initial temperature at $t = 0$.

B. Direct Problem Resolution and Disturbance Impact

In this work, input parameters of (1) are taken into account: $L = 0.1m$, $t_f = 900s$ and $\rho C = 10^6 J.m^{-3}.K^{-1}$. Thermal conductivity is assumed to depend on temperature:

$$\lambda(\theta) = 4 \exp\left(\frac{-\theta^2}{10^4}\right) + 1.$$

In order to describe the impact of the disturbance, let us consider the following disturbance function localized at $x \in [0.04, 0.08]$ such as:

$$f(x,t) = \begin{cases} \frac{10^6(t-240)}{60} & \text{if } t \in [240, 300] \\ 1.4 \times 10^4 \times \theta(x,t) + 10^4 & \text{if } t > 600 \\ 0 & \text{if not} \end{cases}$$

Such a disturbance which depends on the temperature introduces an interesting non-linearity. It could be also suitable to consider random disturbances. Initial temperature is:

$$\theta_0(x) = 25 \left(1.5 \exp\frac{-(x-0.03)^2}{5 \times 10^{-5}} + \exp\frac{-(x-0.05)^2}{10^{-4}} - 0.5 \exp\frac{-(x-0.08)^2}{5 \times 10^{-5}} \right).$$

This configuration aims to show how the control law acts to drive the state of the system more quickly from its initial state to the equilibrium state (zero without disturbances) and how the two types of disturbances (time-dependent for $t \in [240, 300]$ and thermo-dependent for $t \in [600, 900]$) are rejected.

It is important to notice that the orders of magnitude of all the previous parameters are quite realistic. With the thermo-physical parameters previously defined, (1) is solved numerically using finite element method with Comsol-Multiphysics solver interfaced with Matlab program. Without control i.e. $u|_{[a,b]}(x,t) = 0$, temperature evolution is shown in Fig. 1.

Based on Fig. 1., it is obvious that if

$$f(x,t) = 1.4 \times 10^4 \times \theta(x,t) + 10^4$$

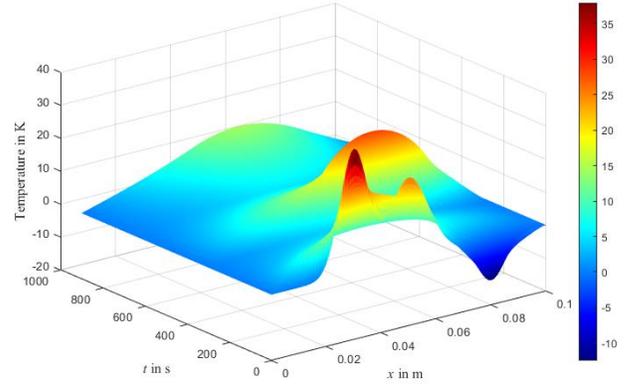


Fig. 1. Temperature evolution without control.

for $x \in [0.04, 0.08]$ and $t > 600$ then

$$\lim_{t \rightarrow \infty} \|\theta(x,t)\|_{L^2(\Omega)}^2 = \lim_{t \rightarrow \infty} \int_0^L [\theta(x,t)]^2 dx = +\infty.$$

In such configuration and due to the disturbance, temperature $\theta(x,t)$ governed by (1) is not stable. In order to illustrate how the temperature is affected by the disturbances f , it is relevant to compute the following criterion (2) which is shown in Fig. 2.:

$$J(\theta) = \frac{1}{2} \|\theta(x,t)\|_{L^2(\Omega)}^2. \quad (2)$$

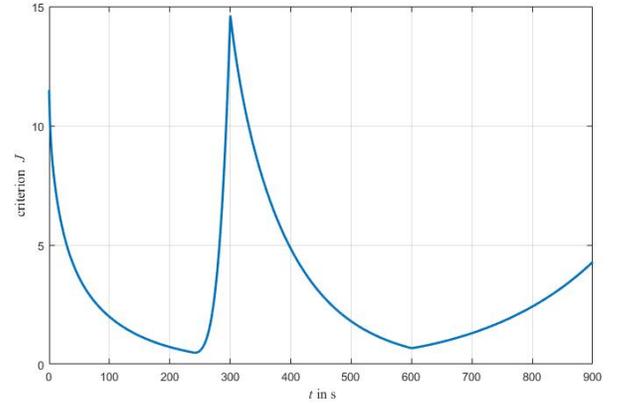


Fig. 2. Criterion evolution without control.

Considering previous figures from 0 to 240 seconds, the system evolves from its initial temperature and naturally tends towards its equilibrium state ($\theta(x,t) = 0, \forall x \in \Omega$) without disturbances. Then between 240 and 300 seconds, the system is affected by a local ($x \in [0.04, 0.08]$) disturbance whose amplitude increases linearly as a function of time. State system is thus quickly moved away from zero. When this first disturbance vanishes at $t = 300s$, temperature naturally converges towards zero. Finally, from 600 seconds, the system is once more disturbed by a function which depends on the temperature. As it has been previously mentioned, such disturbance leads to non

stability. This numerical study illustrates the disturbance impact and will be used as a try-model for our control problem.

In order to reduce the effect of disturbances, an inverse problem is formulated in the next section.

III. IHCP RESOLUTION

In this section, an optimization method is proposed in order to minimize the cost-function defined in (2). This method is based on the Conjugate Gradient Method (CGM) which acts as an iterative regularization method (convergence of this well-known minimization method is discussed for linear systems in [15], [16] and for specific non-linear system in [17], [18]). Examples of numerical implementation for identification purposes in a thermal context are given in [19], [20] or [21]. However, in the works cited above, the authors never broached the question of control.

Minimization algorithm implemented for IHCP resolution is presented hereafter according to the following notations: time interval $\mathcal{T} = [t_o^*, t_f^*]$ is considered, control law $u(x, t)$ is discretized as a piecewise continuous linear function defined by $u(x_i, t_j) = u_{ij}$. Temperature is measured by sensors equally spaced in domain $\Omega = [0, L]$.

A. Conjugate gradient algorithm

At each iteration of the algorithm, three well-posed problems have to be solved:

- The direct problem in order to determine the temperature distribution $\theta^k(x, t_f^*)$, and then to estimate the criterion $J(\theta^k)$;
- The adjoint problem to determine the gradient of the cost function $J(\theta^k(x, t_f^*))$ and thus to define the next descent direction \mathbf{d}^k ;
- The sensitivity problem to estimate the descent depth γ^k (in the descent direction).

Optimization algorithm is briefly described as follows in order to minimize criterion (2) (in [8] a similar algorithm is presented in offline context):

- 1) Initialization of the unknown parameter (control flux) at the first iteration $k = 0$: $[u_{ij}^k] = 0$;
- 2) Resolution of the direct problem (1) in order to determine $\theta^k(x, t)$,
- 3) Determination of the criterion $J(\theta^k(x, t_f^*))$ according to (2);
- 4) Solve the adjoint problem (5) in order to determine the Lagrange multiplier $\psi^k(x, t)$ and the cost function gradient according to (6). Determination of the descent direction \mathbf{d}^k according to (7);
- 5) Resolution of the sensitivity problem (3) in the descent direction \mathbf{d}^k to calculate the sensitivity function $\delta\theta^k(x, t)$ and determination of the descent depth γ^k according to (4);

- 6) Update new estimations of the control according to

$$[u_{ij}]^{k+1} = [u_{ij}]^k - \gamma^k [d_{ij}]^k$$

- 7) Increment of the iteration $k = k + 1$ and back to step 2.

In the following section, sensitivity problem is briefly presented.

B. Sensitivity Problem

In order to calculate at iteration k the descent depth γ^k in the descent direction \mathbf{d}^k , the sensitivity problem has to be solved. Let us consider temperature variation:

$$\theta(x, t) + \varepsilon_0 \delta\theta(x, t)$$

induced by a variation of the control (thermal flux):

$$u(x, t) + \varepsilon_0 \delta u(x, t).$$

Sensitivity function $\delta\theta$ is solution of this so-called sensitivity problem:

$$\left\{ \begin{array}{l} \rho C \frac{\partial \delta\theta^k}{\partial t} - \frac{\partial^2 (\lambda(\theta) \delta\theta^k)}{\partial x^2} = \xi \delta\theta^k + \delta u^k \\ \delta\theta^k(0, t) = \delta\theta^k(L, t) = 0 \\ \delta\theta^k(x, t_0^*) = 0 \end{array} \right. \quad (3)$$

where

$$\xi(x, t) = \begin{cases} 1.4 \times 10^4 & \text{if } t > 600 \text{ and } x \in [0.04, 0.08] \\ 0 & \text{if not} \end{cases}$$

It should be noticed that in the previous equation, the coefficient $\xi(x, t)$ is due to the disturbance $f(x, t)$.

The optimal descent depth γ^k is determined as follow:

$$\gamma^k = \arg \min_{\gamma \in \mathbf{R}} J(\mathbf{u}_a^k - \gamma \mathbf{d}^k),$$

and estimated as in the pioneer work [22]:

$$\gamma^k = \frac{- \int_0^L \theta^k(x, t_f^*) \delta\theta^k(x, t_f^*) dx}{\int_0^L [\delta\theta^k(x, t_f^*)]^2 dx} \quad (4)$$

where $\theta^k(x, t_f^*)$ is the solution of the direct problem and $\delta\theta^k(x, t_f^*)$ is the solution of the sensitivity problem (3) (solved in descent direction \mathbf{d}^k).

In the following section, adjoint problem is developed in order to determine the descent direction \mathbf{d}^k .

C. Adjoint Problem

In order to calculate at each iteration k , the gradient $\frac{\partial J(\theta^k)}{\partial u_{ij}^k}$ and the descent direction \mathbf{d}^k , an adjoint problem is formulated. Let us denote by ℓ a Lagrangian formulation which is a function of $u_{ij}^k(\cdot)$, $\theta^k(\cdot)$ and $\psi^k(\cdot)$ where $\psi^k(\cdot)$ is the adjoint function:

$$\ell(u^k, \theta^k, \psi^k) = J(\theta^k(x, t_f^*)) + \int_{t_0^*}^{t_f^*} \int_0^L F(\cdot) dx dt$$

where F is defined as:

$$F(\cdot) = \left[\rho C \frac{\partial \theta^k}{\partial t} - \frac{\partial}{\partial x} \left(\lambda(\theta^k) \frac{\partial \theta^k}{\partial x} \right) - u^k - f \right] \psi^k$$

The adjoint function $\psi^k(\cdot)$ is fixed such as $\frac{\partial \ell}{\partial \theta^k} \delta \theta^k = 0$. Thus $\psi^k(x, t)$ is solution of the following adjoint problem:

$$\begin{cases} -\rho C \frac{\partial \psi^k(\cdot)}{\partial t} - \lambda(\theta) \frac{\partial^2 \psi^k(\cdot)}{\partial x^2} = \xi \psi^k(\cdot) \\ \psi^k(0, t) = \psi^k(L, t) = 0 \\ \psi^k(x, t_f^*) = -\frac{1}{\rho C} \theta^k(x, t_f^*) \end{cases} \quad (5)$$

Cost function gradient is then obtained as follows:

$$\frac{\partial J}{\partial u_{ij}^k} = - \int_{t_0^*}^{t_f^*} \int_a^b \psi^k(x, t) s_i(x) s_j(t) dx dt \quad (6)$$

where $s_i(x)$ is the basis function in space and $s_j(t)$ is the basis function in time for piecewise continuous linear functions (in space and time). Descent direction can be estimated at each new iteration k from the previous gradient (at iteration $k-1$), as follows:

$$\mathbf{d}^k = - \left(\frac{\partial J}{\partial u_{ij}^k} \right) + \beta_k \mathbf{d}^{k-1} \quad (7)$$

with $\beta_k = \frac{\left\| \left(\frac{\partial J}{\partial u_{ij}^k} \right) \right\|^2}{\left\| \left(\frac{\partial J}{\partial u_{ij}^{k-1}} \right) \right\|^2}$ and $\|\cdot\|$ is the Euclidean norm.

In [7] the previous optimization method has been successfully implemented in order to determine a control strategy which ensures the convergence to zero. The problem was solved offline since $\mathcal{T} = [0, t_f]$ i.e. $t_0^* = 0$ and $t_f^* = t_f$. In the following the online adaptation is presented.

IV. QUASI-ONLINE IMPLEMENTATION

Three quasi-online strategies based on an adaptation of the iterative regularization method of the CGM are implemented in order to determine a relevant control u which steers the temperature to zero. The proposed approaches are based on the choice of receding intervals \mathcal{T} . Let us introduce general comments:

- For the three strategies, it is important to have enough observations contained in \mathcal{T} in order to understand the evolution of the system and to be able acting on it;
- Temperature is measured every centimeter of the domain. Such observation strategy could be easily modified considering experimental constraints;
- The control law is discretized with a spatial step of 3 millimeters inside $[0.03; 0.06]$. This arbitrary choice leads to determine at each time step nine unknown parameters. If this spatial step is too large, then unknown required control distribution might be not possible to describe. If this spatial step is too small, a

large amount of unknown parameters is not useful and overparametrization problems could appear;

- The choice of the time step has obviously a significant effect on the performance of the method. It must be realistic and consistent with the technologies and based on a knowledge of the dynamics of heat transfers. A time step equal to 1 second for both the control and the observation has been chosen in this paper.
- Last but not the least, spatial interval, time discretization and space discretization for disturbances, measurements and control may be different. The formulation of the methodology is not affected by such choices (but it is obvious that results are).

In the next sections, the three strategies are briefly presented.

A. Strategy #1 - constant offset

For the first strategy, τ in seconds is a constant offset. Strategy #1 acts sequentially in order to provide updated control laws at constant intervals. For example, let us denote by \mathcal{T}_m the interval $[m\tau, (m+1)\tau]$.

- for $m = 0$: the process starts at $t_0 = 0$, the system evolves "naturally" from its initial state and under the effect of any external disturbances. After τ seconds, the temperature is measured throughout the plate and allows us to know $\theta(x, \tau)$;
- for $m = 1$: the temperature continues to evolve freely without controller and simultaneously the first control law is estimated considering the measurements collected during the time interval \mathcal{T}_0 ;
- for $m = 2$: the first control validated for the time interval \mathcal{T}_0 is applied and simultaneously the second control law is estimated considering the measurements collected during the time interval \mathcal{T}_1 ;
- for $m = 3$, the second control validated for the time interval \mathcal{T}_1 is applied and simultaneously the third control law is estimated considering the measurements collected during the time interval \mathcal{T}_2 ;
- etc.

IHCP numerical resolution requires a computational time (lower than τ) to identify the command which acts with a delay of 2τ . Results obtained for the strategy #1 are shown for $\tau = 6$ seconds in Fig. 3., Fig. 4. and Fig. 5.

With the identified control law, disturbances effect is reduced as can be seen in Fig. 3. and Fig. 5. The second disturbances (after 600 s) is rejected more efficiently because its effect is proportional to the temperature. In Fig. 4., control evolution is shown at location $x = 0.045$.

B. Strategy #2 - adaptive offset

For the second strategy new control is updated only when the final temperature distribution deviates too far from a previously fixed threshold related to a given \tilde{J} . Temperatures are measured every second. If $J(\theta) > \tilde{J}$ then, the identification procedure is launched taking into account the previous measurements on interval \mathcal{T}_m whose size is equal to τ seconds. This strategy is called adaptive offset.

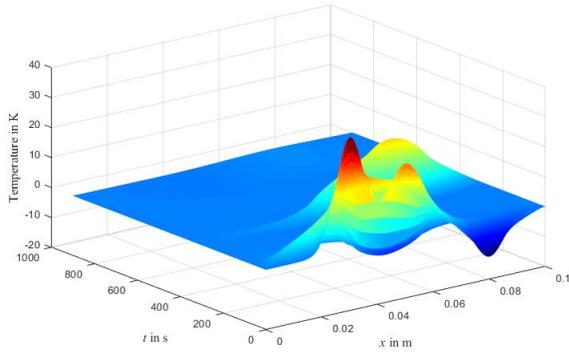


Fig. 3. Temperature evolution with control (strategy #1; $\tau = 6$).

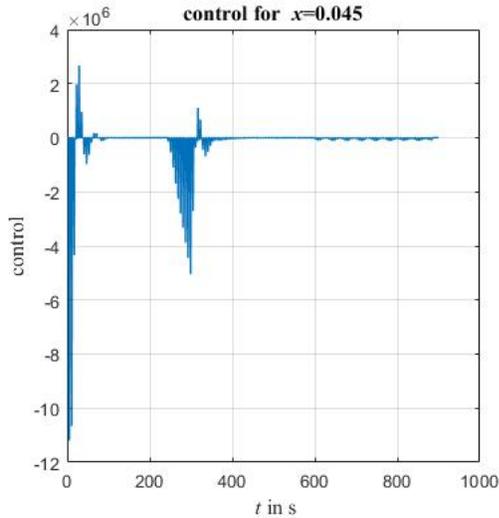


Fig. 4. Control law evolution at $x = 0.045$ (strategy #1; $\tau = 6$).

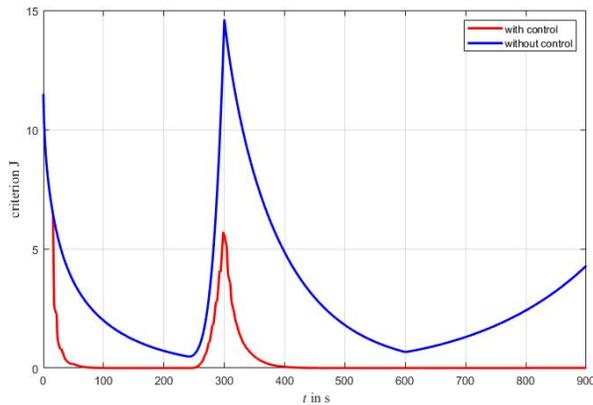


Fig. 5. Criterion evolution with and without control (strategy #1; $\tau = 6$).

Results obtained with strategy #2, are shown for $\tau = 6$ and $\tilde{J} = 0.5$ in the next Fig. 6., Fig. 7. and Fig. 8.

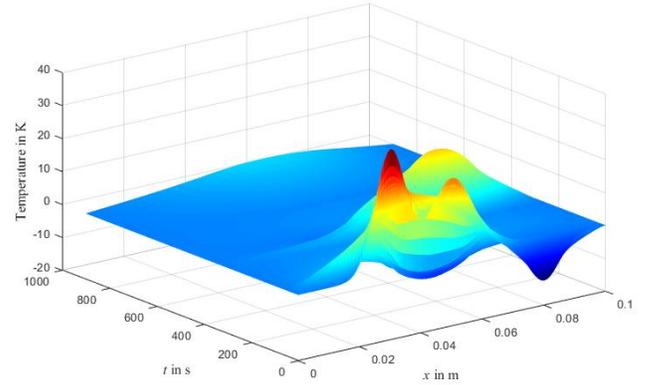


Fig. 6. Temperature evolution with control (strategy #2; $\tau = 6$; $\tilde{J} = 0.5$).

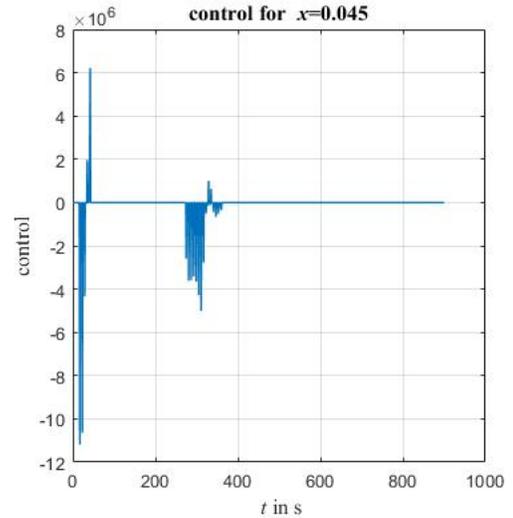


Fig. 7. Control law evolution at $x = 0.045$ (strategy #2; $\tau = 6$; $\tilde{J} = 0.5$).

It is shown in Fig. 6., Fig. 7. and Fig. 8 that disturbance is attenuated even if control laws are calculated less often than according to strategy #1.

C. Strategy #3 - adapted duration

As for the previous strategy, the temperatures are measured every second and the criterion is calculated every second. Strategy #3 differs from the other previous strategies by the modification of the duration of receding time interval $\mathcal{T}_m = [t_{0m}^*, t_{fm}^*]$. In fact, control laws are estimated only if temperature observations leads to a criterion $J(\theta(x, t)) > \tilde{J}_{max}$. In such a case, $t_{fm}^* = t$ and t_{0m}^* is the previous time where $J(\theta(x, \cdot)) > \tilde{J}_{min}$. Thus \tilde{J}_{max} is considered as a prohibitive threshold (for which temperature distribution is too far from zero) and \tilde{J}_{min} is considered as significant threshold (for which temperature distribution begins to move slightly away from its equilibrium state).

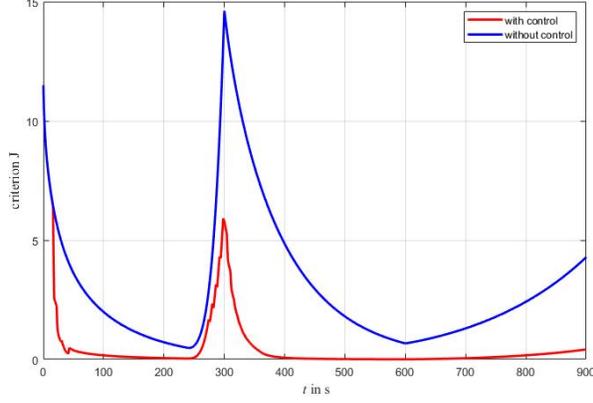


Fig. 8. Criterion evolution with and without control (strategy #2; $\tau = 6$; $\tilde{J} = 0.5$).

Strategy #3 authorizes the recovery of the control laws which can reduce delays. Since the control laws have variable duration, this strategy is called adapted duration strategy.

The request to determine a new control law is triggered as soon as the criterion exceeds prohibitive threshold \tilde{J}_{max} and the new control is implemented as soon as it is determined. Numerical result obtained with $\tilde{J}_{min} = 0.1$ and $\tilde{J}_{max} = 0.5$ are shown in Fig. 9., Fig. 10. and Fig. 11.

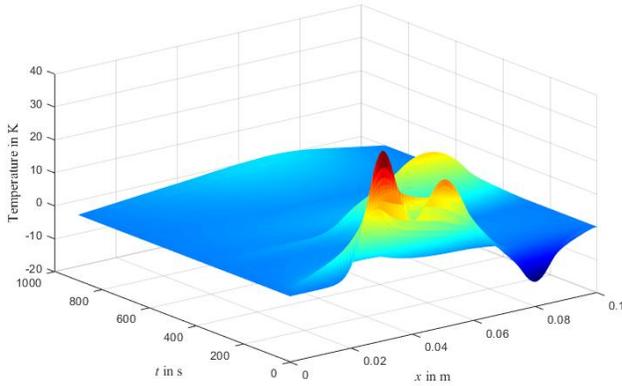


Fig. 9. Temperature evolution with control (strategy #3; $\tilde{J}_{min} = 0.1$; $\tilde{J}_{max} = 0.5$).

V. COMPARISON OF DIFFERENT STRATEGIES

In this section, different tables are proposed in order to compare the previous strategies.

A. Numerical Results

Table I corresponds to the performance of the control by calculating:

$$\tilde{M} = \frac{1}{901} \left(\sum_{j=0}^{900} \left(\frac{1}{2} \left\| \theta \left(x, \frac{j}{900} \right) \right\|_{L^2(\Omega)}^2 \right) \right)$$

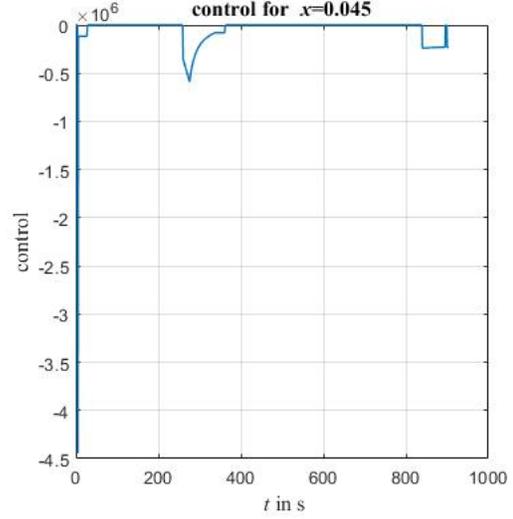


Fig. 10. Control law evolution at $x = 0.036$ (strategy #3; $\tilde{J}_{min} = 0.1$; $\tilde{J}_{max} = 0.5$).

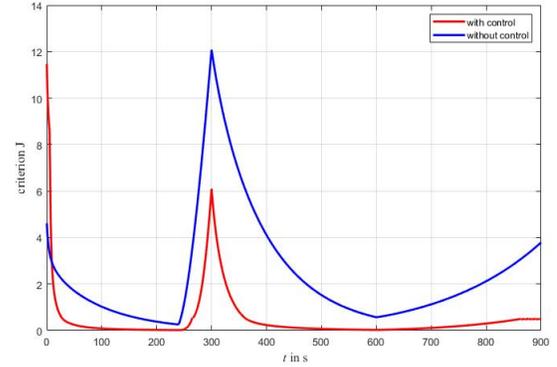


Fig. 11. Criterion evolution with and without control (strategy #3; $\tilde{J}_{min} = 0.1$; $\tilde{J}_{max} = 0.5$).

Obviously, the closer the criterion is to zero, the better the equilibrium state is obtained (Identified control laws are relevant).

Without control: $\tilde{M} \approx 3$.

Table I shows that the strategy #3 with a low triggering threshold $\tilde{J}_{max} = 0.05$ ensures the best null-controllability. It has the closest temperature to zero. Strategies #1 and #2 with a small constant offset, provides good results and keeps the domain temperature close to zero.

Table II provides the duration \tilde{T} during which

$$\max_{x \in \Omega} |\theta(x, t)| > 1^\circ C.$$

These values are calculated from the distributions $\theta(x, t)$ which are calculated for each of the three strategies. Without control $\tilde{T} = 900$ seconds (obtained from the distributions plotted in Fig. 1). Indeed, without control,

$$\max_{x \in \Omega} |\theta(x, t)| > 4.39^\circ C.$$

TABLE I
AVERAGE VALUE OF THE CRITERION.

		Strategy #1	
		$\tau = 6$	$\tau = 15$
$\tilde{M} \approx$		0.41	0.79

Strategy #2				
$\tau = 6$	$\tau = 6$	$\tau = 15$	$\tau = 15$	
$\tilde{J} = 0.5$	$\tilde{J} = 0.1$	$\tilde{J} = 0.5$	$\tilde{J} = 0.1$	
$\tilde{M} \approx$	0.51	0.42	0.89	0.82

		Strategy #3	
		$\tilde{J}_{min} = 0.1$	$\tilde{J}_{min} = 0.01$
		$\tilde{J}_{max} = 0.5$	$\tilde{J}_{max} = 0.05$
$\tilde{M} \approx$		0.49	0.37

TABLE II
TIME \tilde{T} IN SECONDS.

		Strategy #1	
		$\tau = 6$	$\tau = 15$
$\tilde{T} \approx$		271	354

Strategy #2				
$\tau = 6$	$\tau = 6$	$\tau = 15$	$\tau = 15$	
$\tilde{J} = 0.5$	$\tilde{J} = 0.1$	$\tilde{J} = 0.5$	$\tilde{J} = 0.1$	
$\tilde{T} \approx$	726	501	785	682

		Strategy #3	
		$\tilde{J}_{min} = 0.1$	$\tilde{J}_{min} = 0.01$
		$\tilde{J}_{max} = 0.5$	$\tilde{J}_{max} = 0.05$
$\tilde{T} \approx$		863	571

Table II shows that in the studied configuration and according to the parameters chosen, the strategy #1 is the one which makes it possible to remain most often under the threshold temperature fixed here at $1^\circ C$. Strategy #3 could give better results by lowering the trigger threshold \tilde{J}_{max} .

Table III provides the cost control \tilde{U} for each strategy such as:

$$\tilde{U} = \iint_{\substack{x \in [0.03, 0.06] \\ t \in [0, 900]}} u(x, t)^2 dx dt.$$

Table III shows that strategy #3 requires less energy to maintain the temperature near zero (system state equilibrium $\theta = 0$).

Table IV provides the time t_{act} in which the control is not null.

Table IV shows that the strategy #1 requires a lot of calculations to identify the control laws. This could be obviously explained by the fact that the controls are calculated even when it is not useful. We can also notice that strategy #2 requires few calculations but the three previous tables have shown that overall it was less effective than strategies #1 and #3.

TABLE III
COST OF THE CONTROL $\tilde{U} \times 10^{12}$.

		Strategy #1	
		$\tau = 6$	$\tau = 15$
$\tilde{U} \approx$		9.27	8.62

Strategy #2				
$\tau = 6$	$\tau = 6$	$\tau = 15$	$\tau = 15$	
$\tilde{J} = 0.5$	$\tilde{J} = 0.1$	$\tilde{J} = 0.5$	$\tilde{J} = 0.1$	
$\tilde{U} \approx$	10.04	9.45	9.49	9.96

		Strategy #3	
		$\tilde{J}_{min} = 0.1$	$\tilde{J}_{min} = 0.01$
		$\tilde{J}_{max} = 0.5$	$\tilde{J}_{max} = 0.05$
$\tilde{U} \approx$		0.83	0.30

TABLE IV
CONTROL DURATION t_{act} IN SECONDS.

		Strategy #1	
		$\tau = 6$	$\tau = 15$
$t_{act} \approx$		888	870

Strategy #2				
$\tau = 6$	$\tau = 6$	$\tau = 15$	$\tau = 15$	
$\tilde{J} = 0.5$	$\tilde{J} = 0.1$	$\tilde{J} = 0.5$	$\tilde{J} = 0.1$	
$t_{act} \approx$	122	195	198	352

		Strategy #3	
		$\tilde{J}_{min} = 0.1$	$\tilde{J}_{min} = 0.01$
		$\tilde{J}_{max} = 0.5$	$\tilde{J}_{max} = 0.05$
$t_{act} \approx$		186	453

VI. CONCLUDING REMARKS

In this paper, the identification of control law for nonlinear parabolic PDE with homogeneous Dirichlet boundaries conditions is formulated as an inverse problem. It has been shown how disturbances considerably move the temperature away from its equilibrium state. In order to ensure the null-controllability for such nonlinear PDE where internal controls and disturbances are not collocated, three quasi-online strategies have been proposed. The third strategy based on a receding time interval with an adapted duration (related to prohibitive and significant threshold) is the most relevant. Disturbances effect is divided by 10 and this strategy requires less energy comparing to the others one.

In the next future this methodology will be implemented and tested for the control of the nuclear fusion in order to improve the duration of the plasma. In such a way a coupled system of two parabolic nonlinear PDE will be investigated as investigated in [3].

REFERENCES

- [1] L. Attar, T.-P. Tran, L. Perez, E. Moulay, R. Nouaillietas, S. Brémond and L. Autrique, "Plasma thermal characterization in nuclear fusion context," 9th International Conference on Inverse Problems in Engineering (ICIPE), Waterloo, Canada, may 2017.
- [2] O. Gaye, E. Moulay, S. Brémond, L. Autrique, R. Nouaillietas, J.-F. Artaud and Y. Orlov, "Robust stabilization of the current profile in tokamak plasmas using sliding mode approach in infinite dimension," *Control engineering practice*, vol. 21, no. 10, pp. 1350-1358, 2013.
- [3] F. Bribiesca Argomedo, E. Witrant and C. Prieur, "Safety Factor Profile Control in a Tokamak," New-York: Ed. Springer-Verlag, 2014.
- [4] T. Wijnands, D. Van Houtte, G. Martin, X. Litaudon and P. Froissard, "Feedback control of the current profile on Tore Supra," *Nuclear fusion*, vol. 37, no. 6, pp. 777-791, 1997.
- [5] O. Gaye, L. Autrique, Y. Orlov, E. Moulay, S. Brémond and R. Nouaillietas, " H_∞ stabilization of the current profile in tokamak plasmas via LMI approach," *Automatica*, vol. 49, no. 9, pp. 2795-2804, 2013.
- [6] Y. Ou and E. Schuster, "Model predictive control of parabolic PDE systems with dirichlet boundary conditions via galerkin model reduction," American Control Conference, St. Louis, USA. 2009.
- [7] E. Witrant, S. Brémond, G. Giruzzi, D. Mazon, O. Barana, and P. Moreau, "A control-oriented model of the current profile in tokamak plasma," *Plasma Physics and Controlled Fusion*, vol. 49, pp. 1075-1105, 2007.
- [8] T. Azar, L. Perez, C. Prieur, E. Moulay and L. Autrique, "Stabilization using in-domain actuator: A Numerical Method for a Non Linear Parabolic Partial Differential Equation," in Proceedings, 14th APCA International Conference on Automatic Control and Soft Computing (CONTROLO 2020), Bragança, Portugal, 1-3 July, 2020.
- [9] O.M. Alifanov, E.A. Artyukhin and S.-V. Romyantsev, "Extreme Methods for Solving Ill-Posed Problems with Applications to Inverse Heat Transfer Problems," New-York, Begell house Inc., 1995.
- [10] V. Morozov, "Methods for solving incorrectly posed problems," New-York: Ed. Springer-Verlag, 1994.
- [11] A. Vergnaud, L. Perez and L. Autrique, "Adaptive selection of relevant sensors in a network for unknown mobile heating flux estimation," *IEEE Sensors Journal*, sous presse, doi: 10.1109/JSEN.2020.3009779, 2020.
- [12] D. Yue and Q.-L. Han, "Delayed feedback control of uncertain systems with time-varying input delay," *Automatica*, vol. 41, no. 2, pp. 233-240, 2005.
- [13] S. Roy and I.-N. Kar, "Adaptive-robust Control With Limited Knowledge on Systems Dynamics: An Artificial Input Delay Approach and Beyond," ed. Springer Verlag, Singapore, pp. 144, 2020.
- [14] J.-A. Bárcena-Petisco, "Null controllability of the heat equation in pseudo-cylinders by an internal control," *ESAIM Control Optimisation and Calculus of Variations*, <https://doi.org/10.1051/cocv/2020048>, July 2020.
- [15] Z. Strakos, "On the real convergence rate of the conjugate gradient method", *Linear Algebra and its Applications* vol. 154–156, pp. 535-549, 1991.
- [16] Z.J. Shi, S. Wang and Z. Xu, "The convergence of conjugate gradient method with nonmonotone line search", *Applied Mathematics and Computation*, vol. 217, no. 5, pp. 1921-1932, 2010.
- [17] W.W. Hager and H. Zhang, "A survey of nonlinear conjugate gradient methods", *Pacific journal of Optimization*, pp.35-58, 2006.
- [18] J. Sabi'u, A. Shah and M.Y. Waziri, "Two optimal Hager-Zhang conjugate gradient methods for solving monotone nonlinear equations", *Applied Numerical Mathematics*, vol. 153, pp. 217-233, 2020.
- [19] A. Vergnaud, L. Perez and L. Autrique, "Quasi-online parametric identification of moving heating devices in a 2D geometry," *International Journal of Thermal Sciences*, vol. 102, pp. 47 - 61, 2016.
- [20] S. Beddiaf, L. Autrique, L. Perez and J.- C. Jolly, "Heating source localization in a reduced time," *International Journal of Applied Mathematics and Computer Science*, vol. 26, no.3, pp 623-640, 2016.
- [21] A. Vergnaud, G. Beaugrand, O. Gaye, L. Perez, P. Lucidarme and L. Autrique, "Quasi on-line identification of temperature-dependent thermal conductivity," *European Control Conference*, Strasbourg, France, 24-27 June 2014.
- [22] Y.Jarny, M.N. Ozisik and J.P.Bardon, "A general optimization method using adjoint equation for solving multidimensional inverse heat conduction", *International Journal of Heat and Mass Transfer*, vol. 34, no. 11, pp. 2911-2919, 1991.